

# RC2512 12' FOLDING ROTARY CUTTERS



	RC2512	
Horsepower	40-100 HP	
Hitch	Pull-Type; Standard Clevis, LP Performance Self-Leveling	
Working Width (cm)	12' (366)	
Overall Width	12'7"	
Min. Transport Width	7'11"	
Overall Length	13'3"	
Machine Weight - lb (kg)	2,540 (1152)	
Cutting Height	1-1/2" - 12"	
Cutting Capacity	1-1/2" Diameter	
Tongue Weight - lb	793	
Max. Turning Angle	80° with CV	
Deck Height	11"	
Deck Thickness	10 Gauge	
Suspension	Spring on Center Deck	
Deck Rings	N/A	
Side Panel Thickness	3/16"	
Chain Guards Front & Rear	Standard	
Skid Shoes	Wings & Center, Replaceable	
Blades	1/2" x 3" Uplift	
Blade Bolt	Keyed with Hardened Flatwasher & Lock Nut	
Blade Tip Speed (Feet per minute)	540 Center	16,500 fpm,
	Wings	16,000 fpm
Blade Overlap	6"	
Dishpan	Wings	10 Gauge, Round, Dish Shaped with 1" x 3-1/2" Blade Bar
	Center	2" x 8"
Hydraulics	Center	2-1/2" x 8"
	Wings	2" x 8"
Gearbox Rating*	540 RPM; 160 HP Divider; 100 HP Center & Wings	
Gearbox Output Shaft	1-1/2"	
Gearbox Input Shaft	1-3/8" 6 Spline	
Input Driveline	Cat. 4 CV	
Connecting Drivelines	Cat. 3 Slip Clutch	
Tires	21" Laminated Tires or 20.5" Aircraft Tires	
Transport Lights	Standard	

## Mow like the big boys!

Designed with smaller tractors and smaller acres in mind, our 12' Rotary Cutter is packed with a lot of the features found in our larger folding cutters. The 12' width, tight turning radius, and low tongue weight makes this an ideal rotary cutter for compact tractor owners.



**5 YEAR**  
LIMITED WARRANTY



Center spring on the cylinder cushions load on drawbar.




Dual leveling rods enable the cutter to pull equally on the rear axle during travel over rough terrain.



Narrow tongue design handles tight turns - great size for country estates.

**Quick Hitch**  
LAND PRIDE

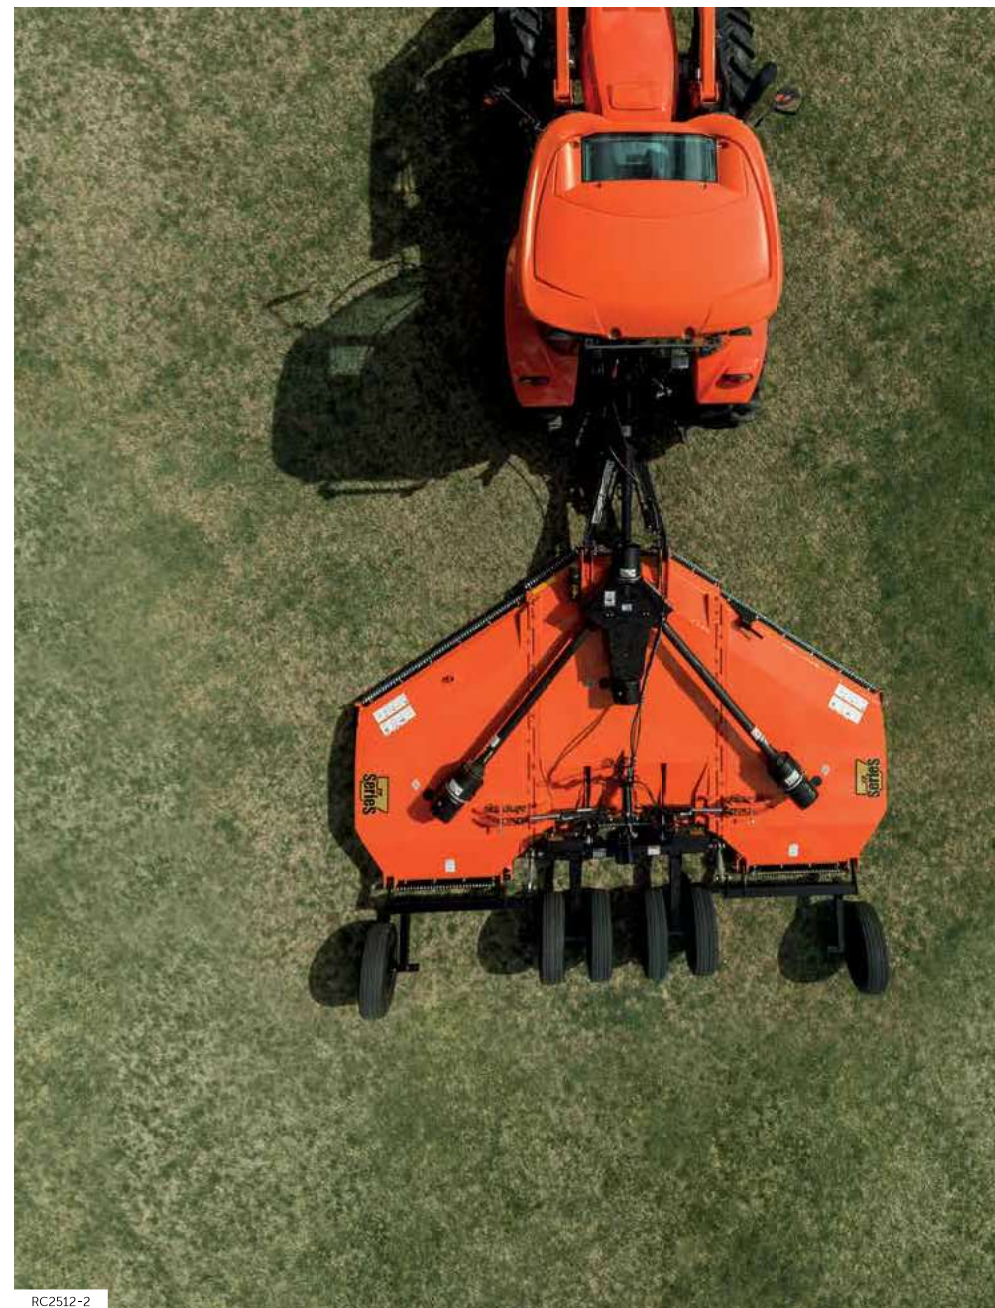

RC2512-2

\*See dealer for complete warranty information. \*Based on field performance. Available Land Pride models and options can vary depending on region. Tractor and loader models shown are not available in all regions. Contact your local Kubota dealer for verification.

## GALVANIZED ROTARY CUTTERS



## RC3715 15' FOLDING ROTARY CUTTERS



RC3715 HEAVY-DUTY		
Horsepower	50-160 HP	
Hitch	Pull-Type; Standard Swivel Clevis, LP Performance Self-Leveling, Ball, Pintle, or Bar-Tite Hitch	
Working Width (cm)	15' (457)	
Overall Width	15'10"	
Min. Transport Width	10'3"; 7'3" w/Narrow Option	
Overall Length	16'3"	
Machine Weight - lb (kg)	4,380 (1,987)	
Cutting Height	1-1/2" - 16" **	
Cutting Capacity	3" Diameter	
Tongue Weight - lb	1,594	
Max. Turning Angle	80° with CV	
Deck Height	12"	
Deck Thickness	10 Gauge	
Suspension	Spring Cushioned Center Axle	
Deck Rings	Optional	
Side Panel Thickness	1/4"	
Chain Guards Front & Rear	Single - Standard Double - Optional	
Skid Shoes	Wings & Center, Replaceable, Beveled	
Blades	12" x 4" Uplift	
Blade Bolt	Keyed with Hardened Flatwasher & Lock Nut	
Blade Tip Speed (Feet per minute)	540 Center	15,268 fpm
	Wings	15,000 fpm
	1000 Center	15,768 fpm
Blade Overlap	Wings	14,620 fpm
	Center	6"
Hydraulics	Dishpan	3/16" Round, Dish Shaped, w/1" x 4" Blade Bar
	Wings	2-1/2" x 12"
	Center	3" x 8"
Gearbox Rating*	540 or 1000 RPM; 160 HP Divider; 130 HP Center & Wings	
Gearbox Output Shaft	2"	
Gearbox Input Shaft	1-3/4" 20 Spline	
Input Driveline	Cat. 6 CV	
Connecting Drivelines	Cat. 4 Slip Clutch	
Tires	21" or 26" Laminated, 29" Used Aircraft, or 24" Foam-Filled	
Transport Lights	Standard	

### Durability for corrosive environments.

The RCG3715 galvanized model is identical to its RC3715 painted counterpart in options and specifications. Land Pride's hot-dipped galvanized coating will add durability to our already durable cutters and provide a tough, rust-resistant coating. For corrosive environments, it adds another option to make Land Pride cutters some of the best in the industry.



**10 YEAR**  
RUST THROUGH  
DECK  
WARRANTY

The durability of our RCG units will be backed up by a 10-year Rust-Through Deck Warranty.

**5 YEAR**  
LIMITED GEARBOX  
WARRANTY



Individual wheel spindles can be replaced when damaged without replacing the entire axle assembly.



Grease zerk on end caps of intermediate and wing drivelines for ease of maintenance.



Hot-dipped zinc galvanized deck offers durable rust protection for harsh conditions and corrosive environments.

### Tame the Plains.

The RC3715 is identical to the RC3712, simply 3 feet wider. It features a 3" cutting capacity, 12" deep deck, 1/4" side skirts, and is available in 540 or 1000 RPM. The tire offering on the RC3715 is expanded to 4, 6, or 8 tires in 4 sizes, including our new 26" laminated tire. Height adjustment utilizes flip over spacers as opposed to the donuts commonly used by competitors. The blades are 1/2" x 4" with a 6" overlap.



**5 YEAR**  
LIMITED GEARBOX  
WARRANTY



Fold options allow for narrow transport or independent control of the wings.



Sliding center shield offers ease-of maintenance for slip-clutches and U-joints.



Optional deck rings keep blades from damaging the cutter deck.

# RC5715 15' FOLDING ROTARY CUTTERS



RC5715 HEAVY DUTY		
Horsepower	60-250 HP	
Hitch	Pull-Type; Constant Level Swivel Clevis, LP Performance Self-Leveling, Ball, Pintle, Bar-Tite	
Working Width (cm)	15' (457)	
Overall Width	16'	
Min. Transport Width	7' 3"	
Overall Length	16'3"	
Machine Weight - lb (kg)	5,446 (2,470)	
Cutting Height	1-1/2" - 16" **	
Cutting Capacity	5" Diameter	
Tongue Weight - lb	2,200	
Max. Turning Angle	80° with CV	
Deck Height	12"	
Deck Thickness	7 Gauge Bottom; 10 Gauge Top	
Suspension	Various Options	
Deck Rings	Deck Rings or DeckArmor™ Optional	
Side Panel Thickness	1/4" Replaceable	
Chain Guards Front & Rear	Single - Standard Double - Optional	
Skid Shoes	AR400 Wings and Center, Replaceable, Beveled	
Blades	12" x 4" Uplift	
Blade Bolt	Keyed with Hardened Flatwasher & Lock Nut	
Blade Tip Speed (Feet per minute)	540 Center	16,400 fpm
	Wings	16,400 fpm
	1000 Center	16,400 fpm
	Wings	16,000 fpm
Blade Overlap	6"	
Dishpan	Forged Diamond Blade Bar; Optional 3/16" Round Bolt-on Dishpan, Optional HD Blade Bar & Dishpans	
	Wings	3" x 8"
Hydraulics	Center	3-1/2" x 8"
	Gearbox Rating*	540 or 1000 RPM; 250 HP Divider, 225 HP Center & Wings
Gearbox Output Shaft	3"	
Gearbox Input Shaft	1-3/8" or 1-3/4" 20 Spline	
Input Driveline	Cat. 6 CV	
Connecting Drivelines	Cat. 4 or Cat. 5 Slip Clutch	
Tires	21" or 26" Laminated, 29" Used Aircraft, or 25.5" Foam-Filled	
Transport Lights	Standard	

## The RC5715 beats the competition.

Land Pride's new RC57 Series is feature-rich and engineered to be the premier roadside Rotary Cutter. Features like sliding shields, end-cap grease zerks on drivelines, maintenance free pivots, an oil level site gauge on gearboxes, and replaceable side skirts make the RC5715 one of the easiest rotary cutters to maintain. The Pre-Cut Chamber allows material to spring back up before being cut, giving a cleaner, more precise finish. Compare Land Pride's serviceability and patented features against the competition and you will agree that the RC5715 is the new standard in heavy-duty Folding Rotary Cutters.



Patented Deck Armor™ is an additional layer of steel which increases durability reducing the possibility of deck damage from blade to deck contact without reducing cut quality.



Patented Parallel Pivot™ axles give you unmatched ground contact for improved holding power on hills and inclines.



Patented sliding center shield offers access for ease-of-maintenance of slip clutches and U-joints.



Convenient flip spacers speed height adjustment and eliminate the need for donut-style spacers which can easily be lost.



Also available as an RCB5715 model with rephasing cylinders.

# RC46 SERIES OFFSET/FOLDING ROTARY CUTTERS



RC4620 HEAVY DUTY		
Horsepower	70-250 HP	
Hitch	Pull-Type; Standard Clevis, LP Performance Self-Leveling, Pintle, Ball, Bar-Tite	
Working Width (cm)	20' (607)	
Overall Width	20' 10"	
Min. Transport Width	9' 11"	
Overall Length	17' 6" with Laminated Tires	
Machine Weight - lb (kg)	6,540 (2,966)	
Cutting Height *	2" - 12"	
Cutting Capacity	3" Diameter	
Tongue Weight - lb	2,160	
Max. Turning Angle	80° with CV	
Deck Height	13"	
Deck Thickness	10 Gauge	
Suspension	Spring Cushioned Center Axle	
Deck Rings	Optional	
Side Thickness	1/4"	
Chain Guards Front & Rear	Single - Standard Double - Optional	
Skid Shoes	Wings and Center, Replaceable, Beveled	
Blades	12" x 4" High Lift	
Blade Bolt	Keyed with Hardened Flatwasher & Lock Nut	
Blade Tip Speed (Feet per minute)	540 Center	17,000 fpm
	Wings	17,000 fpm
	1000 Center	18,000 fpm
	Wings	18,000 fpm
Blade Overlap	6"	
Blade Bar	1" Thick, Standard	
	Dishpan	1" Plate Diamond Blade Bar; Optional 3/16" Round Dishpan
Hydraulics	Wings	3" x 12"
	Center	Rephasing Cylinders
Gearbox	540 RPM or 1000 RPM; 250 HP Splitter, 210 HP Center & Wings(s)	
	Gearbox Output Shaft	2-3/8"
Gearbox Input Shaft	1-3/4" 20 Spline	
Input Driveline	Cat. 6 CV	
Connecting Drivelines	Cat. 5 Slip Clutch	
Tires 6 or 8	21" Laminated, 29" Used Aircraft, or 27" Foam-Filled	
Transport Lights	Standard	

## At home in wide open spaces.

Right of ways, roadsides, pastures, open areas, and row crop fields are all candidates for the RC4620. It handles brush up to 3" in diameter, features a 7-year gearbox warranty, and has blade tip speeds up to 18,000 fpm. Rephasing axles allow for shorter axles which in turn leads to less weight on the tractor drawbar. The 46 Series features a diamond blade bar with an optional bolt-on stump jumper. Decks feature 1/4" side skirts and smooth-top, 10 gauge decks.

- Smooth-top, 10 Gauge Decks
- Replaceable and Reversible Wing and Center Deck Skid Shoes
- Single or Double Chain Guarding
- Hydraulic Rephasing Cylinders on Axle
- Shorter Axle for Lower Drawbar Weight
- Available Land Pride Performance Hitch
- Optional Fully-Welded Deck Rings



Diamond blade bar protects the gearbox seal and gearbox output shaft in tough conditions. Optional bolt-on stump jumper provides extra protection against stumps and other protrusions.



\*Maximum cut height is dependent on tire options selected.

