

RCF36 SERIES DUAL SPINDLE ROTARY CUTTERS

HP REQUIRED
40-130 HP

CUTTING CAPACITY
3"

HITCH
Cat. 1, 2 & 3

CUTTERS




Bigger and Better.

The RCF36 Series are heavy-duty dual spindle cutters with a 3" cut capacity. This rotary cutter is made for pasture maintenance, roadside mowing, and land clearing in reclamation projects. The 210 HP gearboxes are protected from damage by the slip-clutch on the main driveline and impact absorbing flex couplers on the connecting drivelines. The features on this unit add up to a bigger, better cutter.

- Single or dual tires
- 3 Tire options
- 3 Axle options

5 YEAR
LIMITED GEARBOX
WARRANTY*

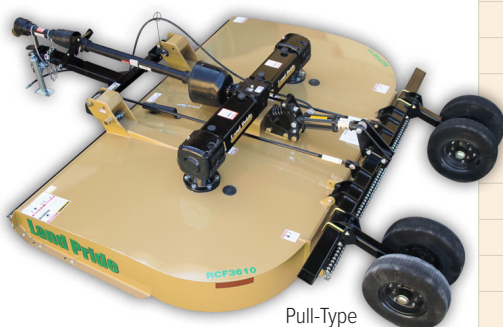

	RCF3696	RCF3610
Horsepower	3-Pt: 50-130 HP Semi: 40-130 HP Pull: 50-130 HP	3-Pt: 60-130 HP Semi & Pull: 50-130 HP
Hitch	Cat. 1 & 2 QH	Cat 2 & 3 QH
Working Width (cm)	8' (244)	10' (305)
Overall Width	8'7"	10'6-1/2"
Overall Length (3-Pt w/Rigid Axle & Chains)	8'10"	10'2"
Weight - lb (kg) (3-Pt w/Rigid Axle & Chains)	1,838 (834)	2,310 (1048)
Cutting Height	2" - 12"	
Cutting Capacity	3" Diameter	
Deck Thickness	10 Gauge	
Deck Height	13"	
Side Thickness	1/4"	
Safety Guards (Choose)	Front: Rubber, Chain or Double Chain Rear: Rubber, Chain or Double Chain	
Skids	Replaceable	
Blades	1/2" x 4" Heat Treated Alloy Steel Free Swinging Blades	
Blade Tip Speed	540: 17,100 fpm; 1000: 17,400 fpm	540: 17,100 fpm; 1000: 17,400 fpm
Dishpan	3/16" Round, Dish Shaped	
Gearbox Rating[^]	Outboard: 210 HP, Center 210 HP	
Gearbox	540 RPM or 1,000 RPM	
Driveline	3-Point & Semi-Mount: Cat. 4 Pull-Type: Cat. 4 Equal Angle or CV	
Driveline Protection	Slip-Clutch and Impact Absorbing Cross Shafts to Outer Gearboxes	
Tailwheels	3-Point & Semi-Mount: 15" or 21" Laminated Pull-Type: 21" Laminated, 24" Foam Filled or 29" Aircraft Tires	
Colors		



RCFM4014

Land Pride offers a three spindle extra heavy duty RCFM4014 for row crop shredding. Visit www.landpride.com for complete specifications.

QUICK HITCH
SYSTEM

RCF36 SERIES SINGLE SPINDLE ROTARY CUTTERS

HP REQUIRED
50-190 HP

CUTTING CAPACITY
4"

HITCH
Cat. 1, 2 & 3

CUTTERS



Our RCF36 Series Rotary Cutter is a brute!

This cutter features a 190 HP gearbox capable of many land clearing tasks including heavy grass and weeds, row crop stubble, thick brush, and small trees up to 4" in diameter.

- Replaceable skid shoes
- Smooth top design
- All welded deck
- Reinforced rear chain guard
- Heavy-duty tailwheel mount
- Floating top hitch
- Pull-type available in 84" model



Tailwheels take a beating but the 1-1/2" heavy-duty spindle gives the strength to protect it.



Optional Shredder Kit makes quick work of prunings and crop residue.

5 YEAR
LIMITED GEARBOX
WARRANTY*

	RCF3672	RCF3684
Horsepower	60-190 HP	Lift: 70-190 HP Pull: 50-190 HP
Hitch	Cat. 1 & 2	Cat. 2 & 3, Pull-Type
Working Width (cm)	72" (183)	84" (213)
Overall Width	78-1/2"	90-1/2"
Overall Length	124-3/4" Pull	130", 179-1/2" Pull
Weight - lb (kg)	1,337 (606)	2,000 (907), Pull-Type 2,104 (954)
Cutting Height	2" - 12"	
Cutting Capacity	4" Diameter	
Deck	All Welded, Smooth Top	
Deck Thickness	3/16"	
Deck Height	13-3/8"	
Side Thickness	1/4"	
Safety Guards (Choose)	Front: Rubber, Single or Double Chains, Rear: Single or Double Chains or Band	
Skids	Replaceable	
Blades	Free Swinging High Lift, 1/2" x 4", Heat Treated Steel	
Blade Bolt	Keyed with Hardened, Flat Washer & Lock Nut	
Blade Tip Speed	14,369 fpm	
Dishpan	3/16" x 30-7/16", Round, Dish Shaped	
Gearbox Rating[^]	190 HP	
Gearbox	540 RPM, 1-3/4" - 20 Spline	
Gearbox Output Shaft	2-3/8"	
Driveline	Cat. 5 with 4 Plate Slip Clutch	
Tailwheel(s)	15" Laminated, w/Cast Iron Hub, Tapered Roller Bearings, 21" on Pull-Type	
Colors		

QUICK HITCH
SYSTEM